


ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

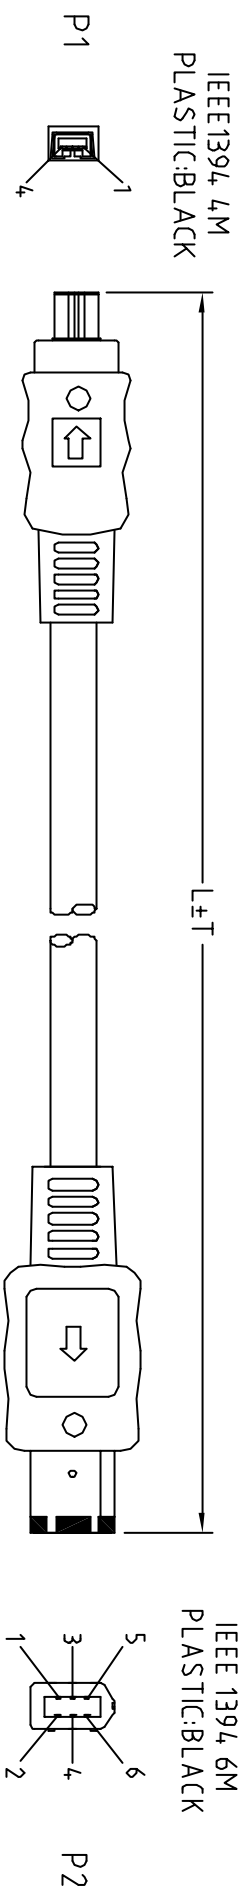

NOTE:

- 1.CABLE:[30AWG(7/0.102)T.C×1PAIR+AL/MYLAR+SPIRAL(50/0.1)]×2+FILLER+MYLAR×2+BRAID(90%)+PVC JACKET COLOR:BLACK(NK-K01)
OD:φ4.8±0.15mm UL20276 IEEE 1394 CABLE

2.CONNECTOR:


P1: IEEE1394 4PIN MALE GOLD PLATED 15μ" CONTACT;
NICKEL PLATED SHELL.

P2: IEEE1394 6PIN MALE GOLD PLATED 15μ" CONTACT;
NICKEL PLATED SHELL.

3.HOOD: MOLDED TYPE,PVC 45P, COLOR: BLACK(NK-K01)

4. TEST REQUEST:

- <1>.100% OPEN SHORT MIS WIRE TEST
 - <2>.CONTACT RESISTANCE 3Ω MAX
 - <3>.INSULATION RESISTANCE 10MΩ MIN
- 5.PACKING: <1>EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL
<2>EACH CARTON / ROHS LABEL(L×W=35×22mm)

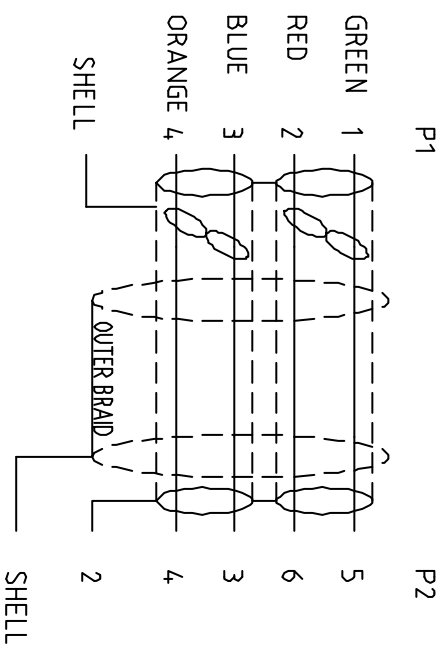

170-2692-3	CF0006	5000±50mm	4260113560426
170-2692-2	CF0005	3000±30mm	4260113560419
170-2692-1	CF0004	1800±30mm	4260113560402
DWG	P/N	L±T	EAN CODE

Tolerances		Inch	M/M	Title 2DIRECT GMBH IEEE 1394 6/4 CABLE
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		
Drawn	FANNIE 04/14/06			Customer P/N
Check				
App'd	Customer		Customer	
Scale	NONE	Units	m/m	Third Angle Projection
Dwg No.	170-2692	REV:	A	Sheet 1/2